

The H9 series total station is an improvement over the already established HTS-580AGX series. The H9 comes equipped with a large color touch screen, a completely new user icon based interface, and expanded internal memory to hold more programs on board than before. The H9 is also equipped with a Bluetooth™ interface for connection to PDA and other compatible devices. The interface is designed for ease of use and intuitive user navigation. This instrument also offers an optional reflectorless measuring range of 500m for users who need it. The H9 is based on the HTS-580AGX, only better, faster, and more powerful.

The new HORIZON H9 series total station.

The evolution continues, in color.



Features:


- Dual axis compensation
- Absolute Encoding
- Available in 2, 3 or 5"
- Large Color LCD touchscreen w stylus pen and slot
- New User-friendly user environment
- Optional 500m reflectorless range extension
- Expanded on-board memory
- Improved programs for more user flexibility and efficiency
- RS232, USB and Bluetooth™ communication interfaces
- Automatic temperature and pressure sensors
- Incorporates COGO/ Traverse and Road Measure software on same instrument



The new H9 LCD color touch screen interface



Graphical point and line plotting function

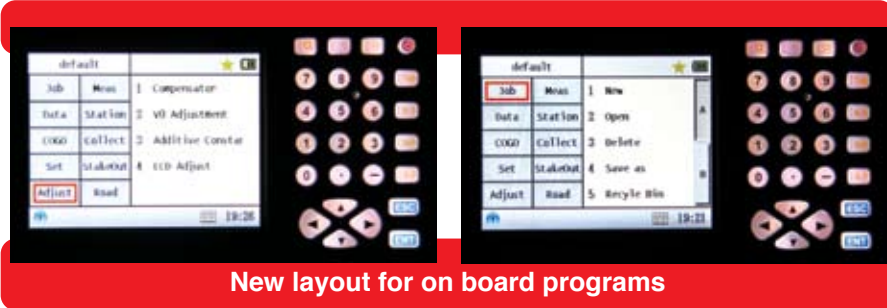

New layout for on board programs



	H92	H93	H95
TELESCOPE			
Image	Erect		
Magnification	30X		
Effective Aperture	45mm EDM:50mm		
Resolving power	3"		
Field of view	1°30'		
Minimum focus	1.3m		
Telescope length	152mm		
ANGLE MEASUREMENT			
Encoder type	Absolute encoding		
Disc Diameter	79mm		
Minimum reading	1"/5"		
Detection method	H: Dual V: Dual		
Units of measurement	Degrees/Gons/Mil		
Accuracy	2"	3"	5"
DISTANCE MEASUREMENT			
Single Prism	3000m		
Triple Prism	5000m		
Reflector sheet	800m		
Reflectorless range	300m * (500m range optional upgrade available)		
Unit of measurement	Meters/Feet		
Accuracy	±(2 + 2x10 ⁻⁶ .d)mm with prism ±(3 + 2x10 ⁻⁶ .d)mm reflectorless		
Measuring time	Single Fine Measure: 0.7s, Tracking: 0.7s/measure		
Wavelength	685nm		
Atmospheric temperature/pressure correction	Automatic Sensing		
Atmospheric refraction and Earth curvature correction	Automatic Correction k=0.14/0.20		
Reflector constant correction	Automatic		
VIAL			
Circular vial precision	8'/2mm		
Plate vial precision	30"/2mm		
COMPENSATOR			
System	Dual Axis Photoelectric detection		
Compensating range	±4'		
Resolving power	1"		
PLUMMET			
Type	Optical or Laser		
Image	Erect		
Magnification	3X		
Focusing range	0.3m ~ ∞		
Field of view	5°		
DISPLAY			
Type	Large LCD Display, color graphics, touchscreen		
INPUT MODE			
Method	Alphanumeric keypad, touchscreen w stylus pen		
DATA TRANSFER			
Available interface	RS-232, USB, Bluetooth™		
DATA STORAGE			
Internal Memory	>10,000pts or >20,000 coordinates		
SD Card	2GB SD card included		
BATTERY			
Type	Ni-H rechargeable		
Voltage	6V DC		
Operating duration	9hrs		
OPERATING TEMPERATURE			
Range	-20°C to 50°C		
PHYSICAL DIMENSIONS			
Dimensions	160 X 150 X 340mm		
Weight	5.4kg		
Waterproofing standard	IP55		

*Using the HORIZON supplied target board, grey side (KODAK Standard A4 x 18% x gray 0.18)

"Kodak" is a trademark of Eastern Kodak Company

HORIZON®
MEASURE RIGHT

ASME (ANPHE ZAOBAO) AWARD
2007 Singapore Prestige Brand
Winner, SPBA - Regional Brands



www.horizon.sg

SINGAPORE
SURVEY INSTRUMENTS
SERVICES PTE LTD
Tel: (65) 6288 4622
Fax: (65) 6288 2033
Email: info@horizon.sg

BRAZIL
MÉTRICA TECNOLOGIA
E EQUIPAMENTOS
Tel: +55 19 3432 5556
Email: contolo@metrica.com.br

CHINA
SIS SHANGHAI
Tel: +86 21 6236 0569
Fax: +86 21 6236 0614

COLOMBIA
ELBER DE J. HERNANDEZ D-
INGENIERIA CIVIL & AMBIENTAL
Tel: 011 57 4215 441
Fax: 011 57 4139 964

EUROPE
HORIZON INSTRUMENTS B.V
Tel: +31 485 361 053
Fax: +31 485 361 054
Email: office@surveying.nl

INDIA
ANSARI PRECISION
INSTRUMENTS PVT LTD
Tel: +91 1332 261277
Fax: +91 1332 264277
Email: info@apiroter.com

INDONESIA
PT KESUMA
Tel: (62) 21 7591 7538
Fax: (62) 21 7591 7537

MALAYSIA
SURMAP SDN. BHD.
Tel: +603 5633 8877
Fax: +603 5880 9960

THE PHILIPPINES
SICCION MARKETING, INC
Tel: 63 2732 6771
Fax: 63 2732 8647
Email: sales@siccionmarketing.com

USA
HORIZON MEASUREMENTS INC.
Tel: +1 909 889 6020
Fax: +1 909 889 6080
Toll Free: 1 888 710 8282